

Artome X20

Projector Installation guide



1. Installer toolkit contents: cable harness and thumb screws.

NOTE: Cables may already be installed.



2. Compatible projector models: EB-PU1006, EB-PU1007, EB-PU1008, EB-PU2010, EB-PQ2008, EB-PQ2010.
Compatible lenses: ELPLU04 (default), ELPW06, ELPLM15, ELPLL08.



3. Place the projector on the table. Remove the lens cover and the top cover.



4. Remove the lens unlocking cover.



5. Install the lens in correct position.



6. Lock the lens.



7. Reinstall the top cover.



8. Turn each leg clockwise until it stops. The legs must be fully retracted before installation.



9. Lock the wheels before proceeding. Remove the back door. Press the hinge release to remove it, supporting the door while detaching.

Artome X20

Projector Installation guide



10. Slide the projector inside the cabinet. Another person's assistance is helpful in this step.



11. Align and lower the front legs to the alignment holes.




12. Align and lower the back legs to the alignment holes.



13. Attach the projector with the thumb screws.



14. Connect the following cables:
HDMI 1, PROJECTOR AUDIO, RS-232,
PROJECTOR POWER.

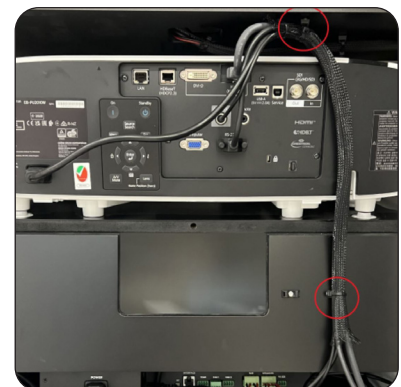

15. Attach the cable harness with zip ties.

NOTE: Cables may already be installed.



16. Connect the cables to their corresponding connectors on the projector.



17. Remove the plastic lens cover before using the device.



18. Plug in power and turn on the device. Wait 3 minutes until the automatic setup is completed.

The device will shut down when ready.